



# **FLOOR SCREED PUMP** **PNEUMATIC CONVEYORS**

**INNOVATIVE - QUALIFIED - TRUSTED**

**SCREED • PLASTER • GROUT • CONCRETE • SHOTCRETE • PLANT  
BLASTING • ROADHEADER • ATEX**

**www.tekkok.com.tr**

TEKKÖK is a registered trademark

## TEKKÖK® FLOOR SCREED PUMP

We started the production of our floor screed pumps in 2005. As a key manufacturer with her factory located in Turkey, we offer solutions to screed jobs in constructions. We use all the technological advancement and opportunities of our era while designing a product. As a brand name **TEKKÖK®** means innovation, quality and trust.

### 6.3 m³/min AIR OUTPUT

We offer our model with 4-cylinder engine as one of the most improved floor screed pumps in the world. It is a very unique model with such high air production as 6.8 m³/min which promises faster delivery in shorter time.

### PNEUMATIC CONVEYOR: IMPROVED TECHNOLOGY UNIQUE - POWERFUL - ROBUST

It is a unique, powerful and robust pneumatic conveyor for conveying screed. It is a product with many helpful additions for working with the maximum performance and efficiency. It is improved with a more powerful compressor for a higher output rate which promises to finished the job faster.


### HYDRAULIC-DRIVEN MIXER: IN BOTH LEFT & RIGHT WAYS

The hydraulic-driven mixer is optional. It can be operated in both left and right ways. It allows to reverse the way of mixing when it is chocked up because of improper loading. It helps releasing the mixer without stopping the machine or opening the mixer.

## TEKKÖK® FLOOR SCREED PUMP Pneumatic-Type

www.tekkok.com.tr

MADE IN  
Turkey  
Discover  
the potential

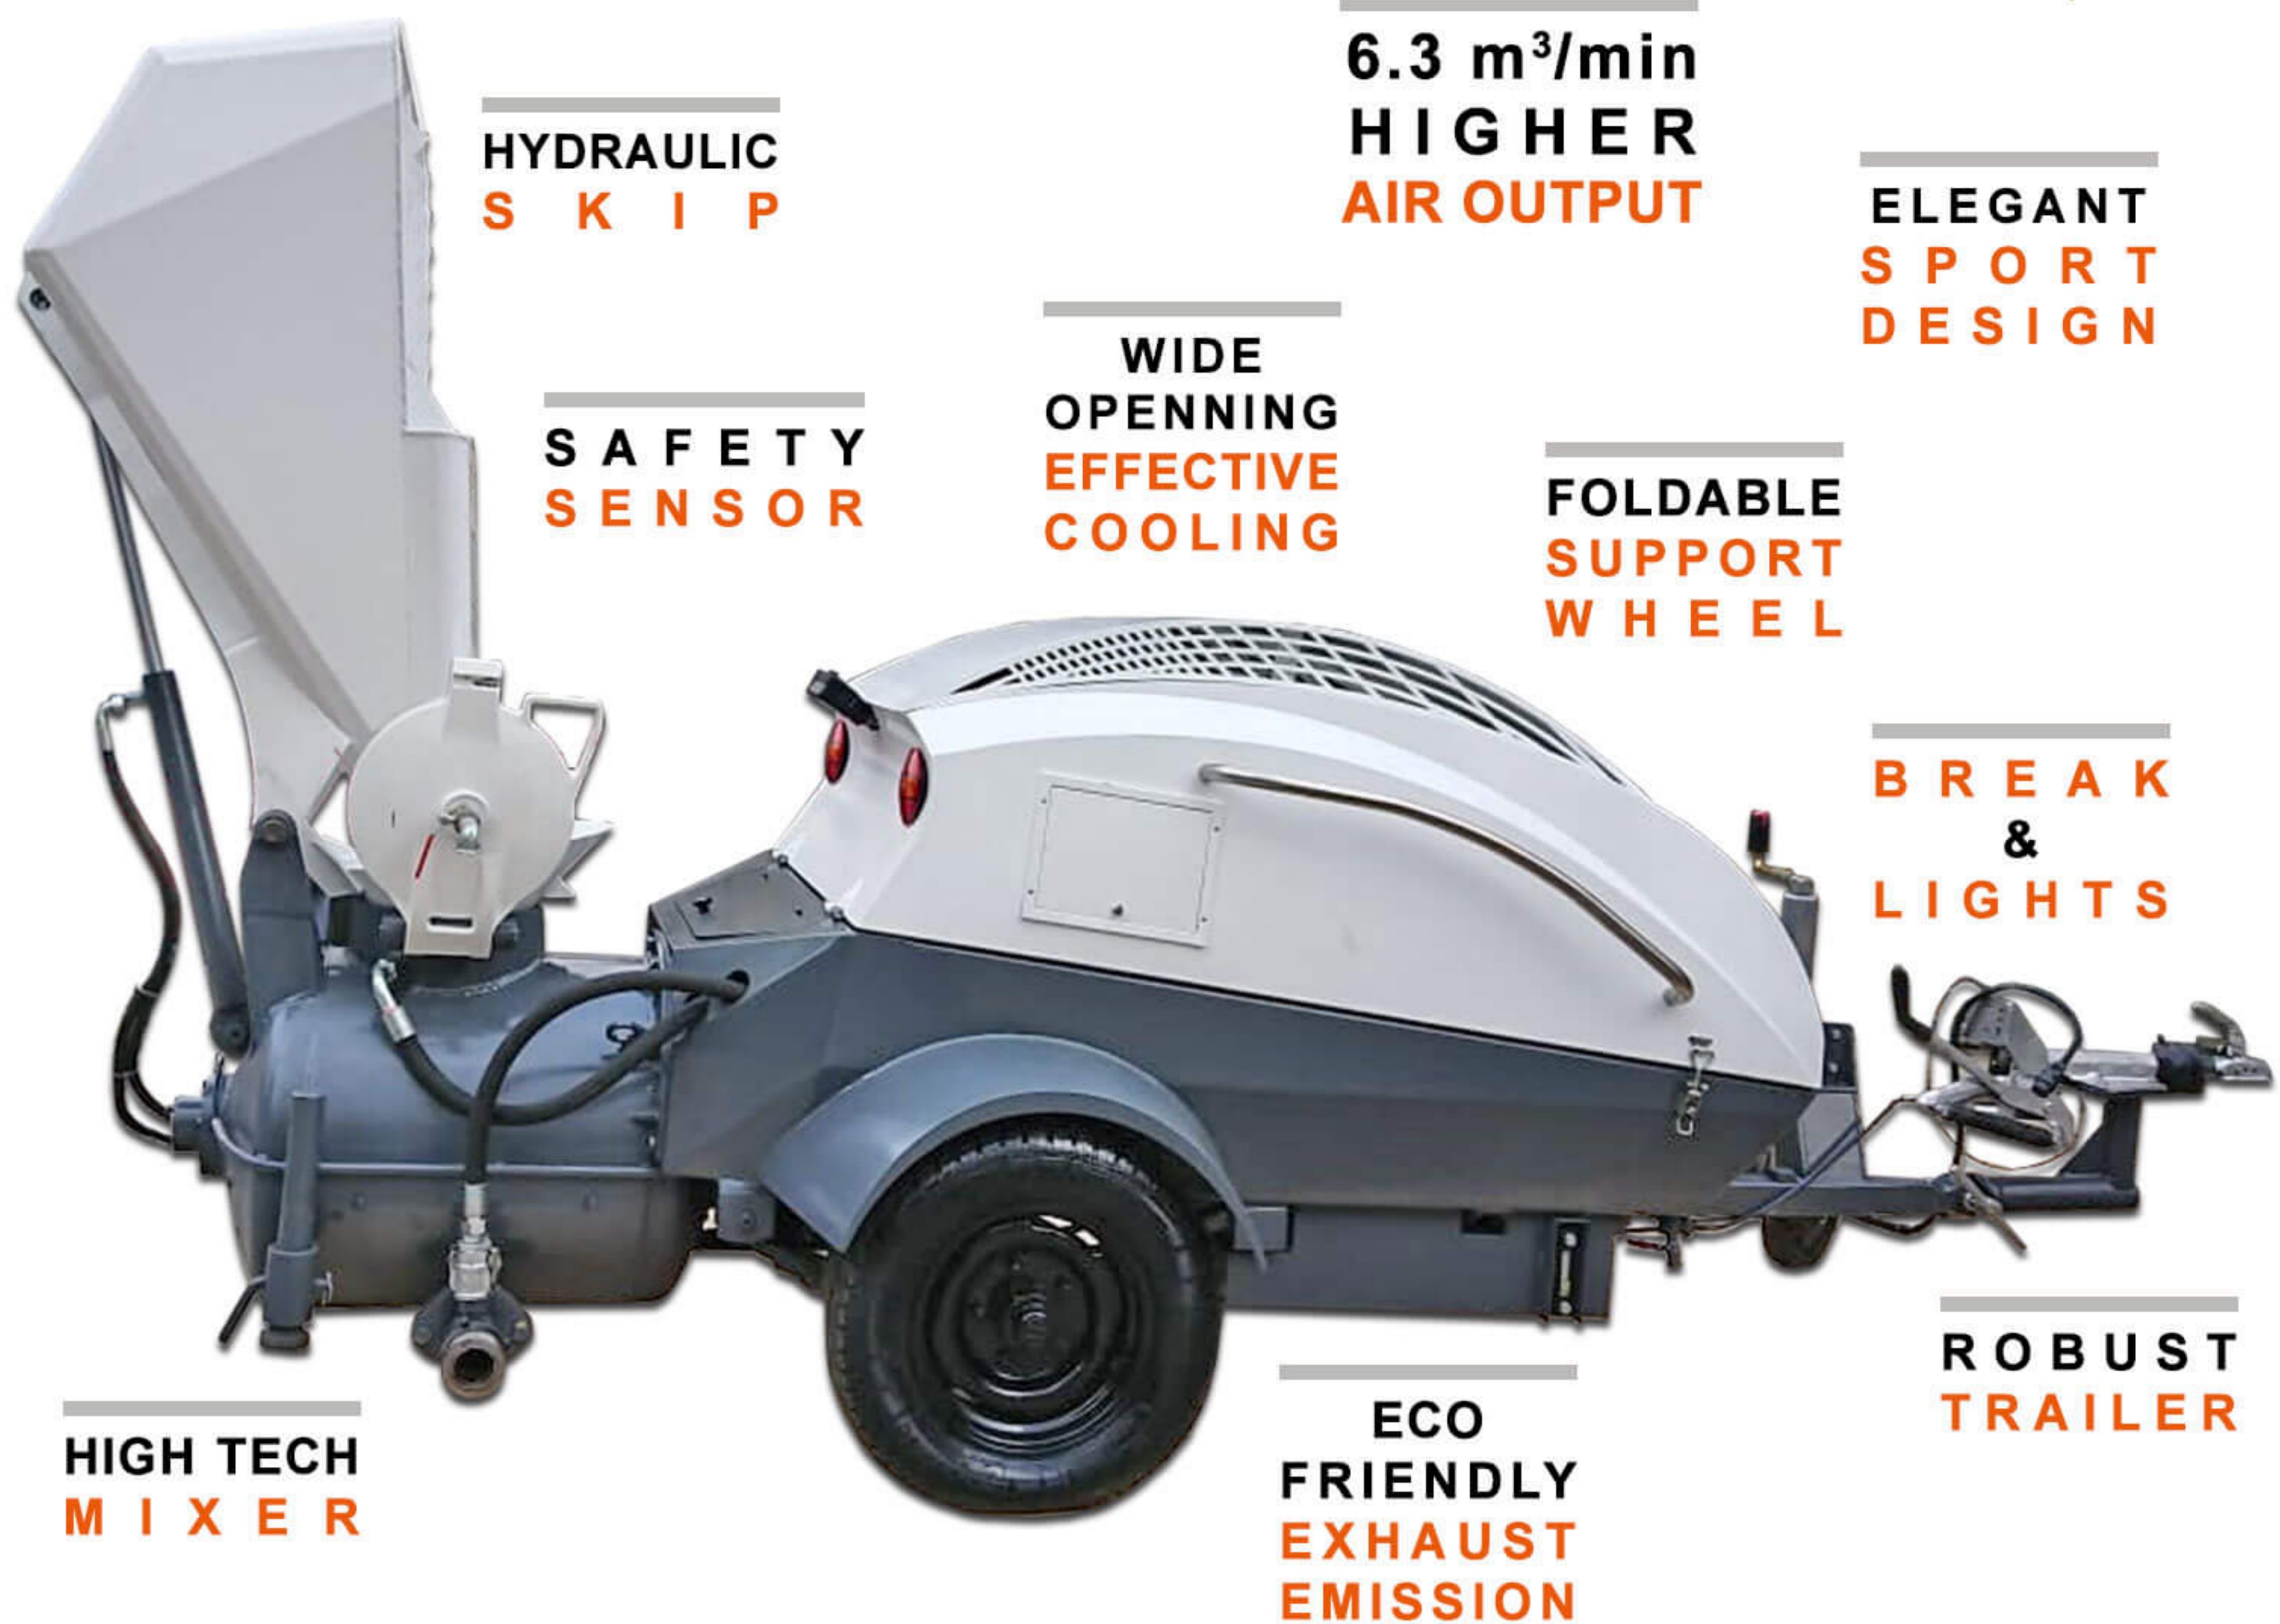

HYDRAULIC  
SKIP

6.3 m³/min  
HIGHER  
AIR OUTPUT

ELEGANT  
SPORT  
DESIGN

SAFETY  
SENSOR

WIDE  
OPENNING  
EFFECTIVE  
COOLING

FOLDABLE  
SUPPORT  
WHEEL

BREAK  
&  
LIGHTS

HIGH TECH  
MIXER

ECO  
FRIENDLY  
EXHAUST  
EMISSION

ROBUST  
TRAILER

## GENERAL FEATURES

It is installed with the Deutz diesel engine with oil cooling. The engine options with both 3 and 4-cylinder options are available. The models with 4-cylinder engine can deliver screed up to 200 m high where as the models with 3-cylinder can deliver up to 120 m.

The greatest advantage of our machines is the high output rates. All of our models are offered with the screw compressors which produce air more than the equivalents. The more amount of air production helps to discharge the mixer in shorter time. Especially the air production of the models with 4-cylinder engine is uniquely higher. It is the highest air flow in many regions promising faster delivery rate with shorter discharge time, which helps to finish the screed job sooner.

It starts the delivery with single button touch. It stops producing air automatically once the mixer is discharged. Manuel delivery mode is also available.

## TECHNICAL SPECIFICATIONS

	WM-65S	WM-65	WM-55S	WM-55
Trigger	Turbo Diesel		Diesel	
Engine	DEUTZ, 45 kW		DEUTZ, 36 kW	
Cylinder	4-Cylinder		3-Cylinder	
Screw compressor	6.3 m³/min @ 7 bar		5.3 m³/min @ 7 bar	
Hydraulic feeder	+	-	+	-
Delivery rate	6.8 m³/h	5.8 m³/h	5.8 m³/h	4.8 m³/h
Delivery distance	200 m ↑↓		120 m ↑↓	
Grain size support	0-16 mm (Optionaly 32 mm)			
Mixer hopper volume	260 lt			
Mixer filling height	400 mm	800 mm	400 mm	800 mm
Oil pump	Automatic + Manuel			
Vehicle connection	Hitch connection			
Suspension	Suspension with Torsion			
Dimensions (W x L x H)	1500 x 4600 x 2000 mm			
Weight	w/ Skip: 2050 kg		w/out Skip: 1900 kg	

### Additional Features

- Both automatic and manual delivery modes
- Indicator lights and gauges as warning indicators
- Drive lights
- Optional safety sensor to the mixer grid
- Optional vibrator to the mixer grid
- Optional hydraulic-driven mixer
- Optional scrapper to the hydraulic skip

